

数显扁头内沟槽卡尺




1120-150A
A型




1120-150B
B型

测深定位块6143(选配)



1120-150P
C型

- 符合企业标准
- 用于测量内凹槽等
- 分辨率: 0.01mm/0.0005"
- 按键:
 - A型: 开/关, 设置数值, 公/英制转换, 数值预置(+, -)
 - B型: 开/关, 置零, 公/英制转换
 - C型: 开/关, 置零, 公/英制转换, 相对/绝对测量转换, 数据保持
- CR2032电池
- 不锈钢尺身
- 可选附件: 测深定位块(仅适用于c=16mm的卡尺, 型号6143)

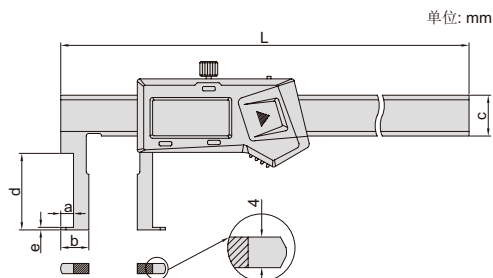

不防尘/防水, 无预置功能(读数需加测爪宽度)

型号	测量范围	类型	精度	L	a	b	c	d	e
1120-150B	50-150mm/1.97-6"	B	±0.06mm	270mm	8mm	25mm	20mm	90mm	3.4mm
1120-200B	60-200mm/2.36-8"	B	±0.06mm	320mm	10mm	30mm	20mm	100mm	3.4mm
1120-300B	60-300mm/2.36-12"	B	±0.07mm	420mm	10mm	30mm	20mm	110mm	3.4mm

不防尘/防水, 有预置功能, 带数据接口(读数无需加测爪宽度)

(mm)

型号	测量范围	类型	精度	L	a	b	c	d	e	数据传输
1120-150A	22-150mm/0.87-6"	A	±0.04mm	250	5	11	16	30	1	数据线(型号 7315-21, 7302-21 , 选配)
1120-1501	35-150mm/1.38-6"	A	±0.06mm	250	6	17.5	16	60	1.5	数据线(型号 7315-21, 7302-21 , 选配)
1120-200A	25-200mm/0.98-8"	A	±0.04mm	310	5	12.5	16	40	1	数据线(型号 7315-21, 7302-21 , 选配)
1120-2001	40-200mm/1.57-8"	A	±0.06mm	310	7	20	16	70	2.5	数据线(型号 7315-21, 7302-21 , 选配)
1120-300A	30-300mm/1.18-12"	A	±0.05mm	410	5	15	16	50	1.5	数据线(型号 7315-21, 7302-21 , 选配)
1120-3001	50-300mm/1.97-12"	A	±0.07mm	410	8	25	16	80	2.5	数据线(型号 7315-21, 7302-21 , 选配)
1120-500	40-500mm/1.57-20"	A	±0.07mm	680	5	20	24	90	2.2	数据线(型号 7315-22, 7302-22 , 选配)
1120-5001	60-500mm/2.36-20"	A	±0.08mm	680	10	30	24	120	3.4	数据线(型号 7315-22, 7302-22 , 选配)
1120-5002	80-500mm/3.15-20"	A	±0.08mm	680	16	40	24	150	5.2	数据线(型号 7315-22, 7302-22 , 选配)

不防尘/防水, 有预置功能, 内置无线(读数无需加测爪宽度, 需选配接收器, 型号**7315-2/3/6/7/8/9**)

型号	测量范围	类型	精度	L	a	b	c	d	e
1120-150AWL	22-150mm/0.87-6"	A	±0.04mm	250mm	5mm	11mm	16mm	30mm	1mm
1120-1501WL	35-150mm/1.38-6"	A	±0.06mm	250mm	6mm	17.5mm	16mm	60mm	1.5mm
1120-200AWL	25-200mm/0.98-8"	A	±0.04mm	310mm	5mm	12.5mm	16mm	40mm	1mm
1120-2001WL	40-200mm/1.57-8"	A	±0.06mm	310mm	7mm	20mm	16mm	70mm	2.5mm
1120-300AWL	30-300mm/1.18-12"	A	±0.05mm	410mm	5mm	15mm	16mm	50mm	1.5mm
1120-3001WL	50-300mm/1.97-12"	A	±0.07mm	410mm	8mm	25mm	16mm	80mm	2.5mm
1120-500WL	40-500mm/1.57-20"	A	±0.07mm	680mm	5mm	20mm	24mm	90mm	2.2mm
1120-5001WL	60-500mm/2.36-20"	A	±0.08mm	680mm	10mm	30mm	24mm	120mm	3.4mm
1120-5002WL	80-500mm/3.15-20"	A	±0.08mm	680mm	16mm	40mm	24mm	150mm	5.2mm

IP67防尘/防水, 无数据传输, 不自动关机, 每次开机需置零, 无预置功能(读数需加测爪宽度)

型号	测量范围	类型	精度	L	a	b	c	d	e
1120-150P	22-150mm/0.87-6"	C	±0.04mm	250mm	5mm	11mm	16mm	30mm	1mm