



数显可换测头卡尺

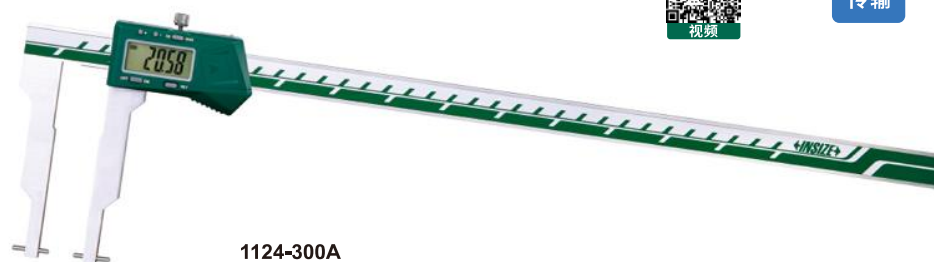

数据传输

预置按键



1124-300A


球面/平面短测头(标配)





球面/平面长测头(标配)




球面薄片短测头(标配)



球面薄片长测头(标配)

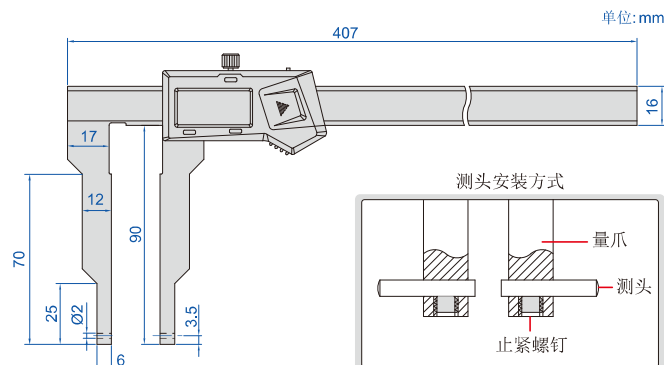

测头安装方式




- 符合JB/T异形卡尺国家机械行业标准
- 不防水
- 配四对可换测头
- 配外测对零块(10mm量块)
- 分辨率: 0.01mm/0.0005"
- 按键: 开/关, 设置数值, 公/英制转换, 数值预置(+, -)
- 自动关机, 拉动尺身开机
- CR2032电池
- 数据传输
- 不锈钢尺身
- 可选附件: 测头(型号1526-T101, 7392, 7391, 7381, 7321), 测深定位块(型号6143)

外测对零块(标配)



测量内凹槽和外凹槽

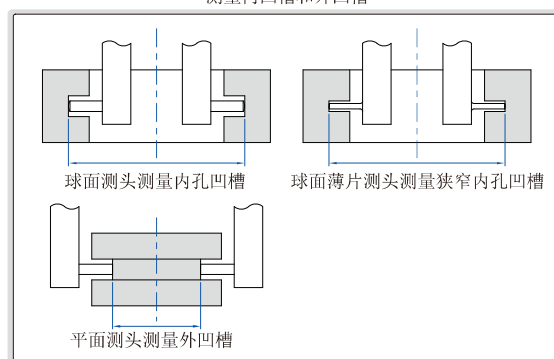

带数据接口

型号	数据传输
1124-300A	数据线(型号7315-25需选配接收器, 7302-21, 选配)

内置无线

型号	数据传输
1124-300AWL	接收器(型号7315-2/3/6/7/8/9, 选配)

测头	测量范围	精度	适用范围
球面/平面短测头	24-324mm/1-12.7"(内尺寸) 0-288mm/0-11.3"(外尺寸)	±0.04mm	球面测头测量内孔凹槽(小孔) 平面测头测量外凹槽
球面/平面长测头	40-340mm/1.5-13.3"(内尺寸) 0-272mm/0-10.7"(外尺寸)	±0.04mm	球面测头测量内孔凹槽(大孔) 平面测头测量外凹槽
球面薄片短测头	24-324mm/1-12.7"(内尺寸) 0-288mm/0-11.3"(外尺寸)	±0.04mm	测量狭窄内孔凹槽(小孔)
球面薄片长测头	40-340mm/1.5-13.3"(内尺寸) 0-272mm/0-10.7"(外尺寸)	±0.04mm	测量狭窄内孔凹槽(大孔)

多功能测头7392^{*}(选配)球测头7391^{*}(选配)螺纹测头7381^{*}, 7321^{*}(选配)

测深定位块6143(选配)

^{*} 当使用这些测头时需选配测头座(型号1526-T101)