

多功能数显卡尺

数据  
传输




1125-600



视频

- 符合企业标准
- 不防水
- 按键: 开/关, 置零, 公/英制转换, 相对/绝对测量转换, 设置初始值
- 自动关机, 拉动尺身开机
- CR2032电池, 数据传输
- 不锈钢尺身

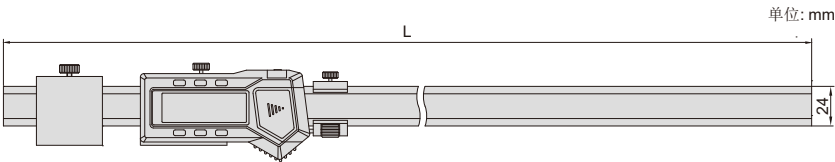

带数据接口(数据线型号7315-22, 7302-22选配)

| 型号        | 测量范围*          | 分辨率            | 精度      | L      |
|-----------|----------------|----------------|---------|--------|
| 1125-600  | 0-600mm/0-24"  | 0.01mm/0.0005" | ±0.05mm | 778mm  |
| 1125-1000 | 0-1000mm/0-40" | 0.01mm/0.0005" | ±0.07mm | 1205mm |

配合量爪使用



配合支架使用




内置无线(需选配接收器, 型号7315-2/3/6/7/8/9)


| 型号          | 测量范围*          | 分辨率            | 精度      | L      |
|-------------|----------------|----------------|---------|--------|
| 1125-600WL  | 0-600mm/0-24"  | 0.01mm/0.0005" | ±0.05mm | 778mm  |
| 1125-1000WL | 0-1000mm/0-40" | 0.01mm/0.0005" | ±0.07mm | 1205mm |

\*当使用不同测头时, 卡尺测量范围可能变化


半盘形测头(标配)

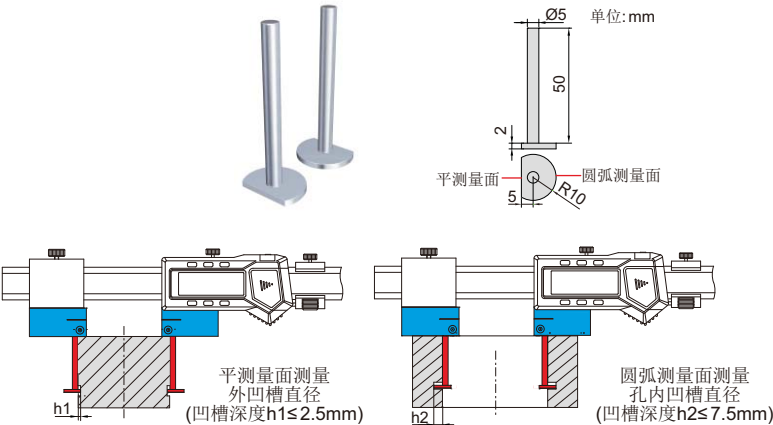


圆锥形测头(选配)

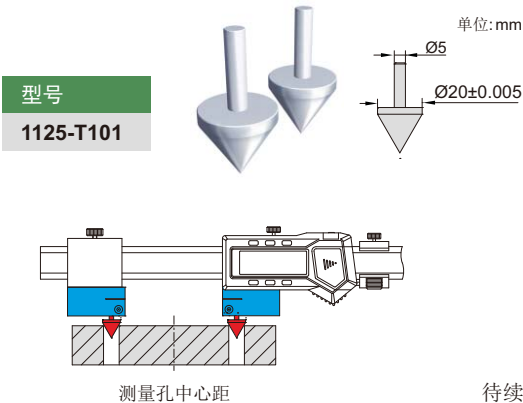



## 圆肩形测头(选配)

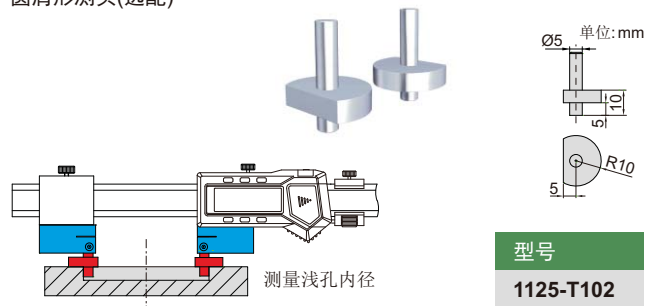



## 方肩形测头(选配)

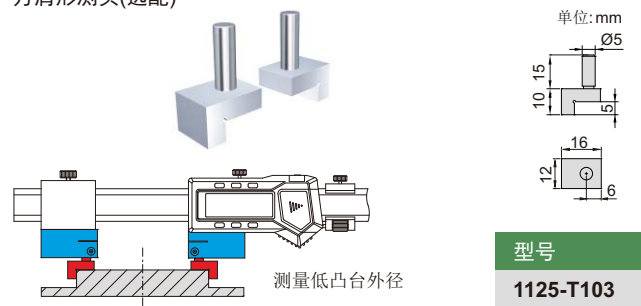



## 测头座(选配)

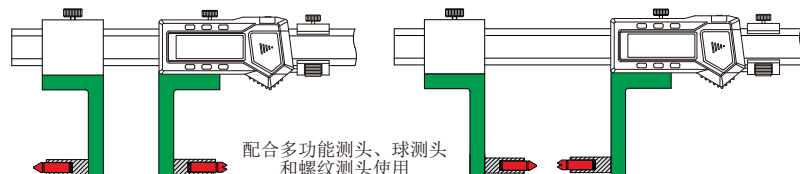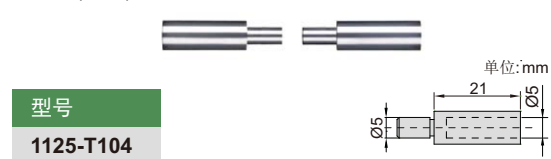


## 球面测头(标配)

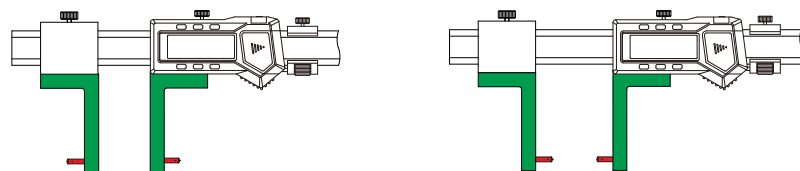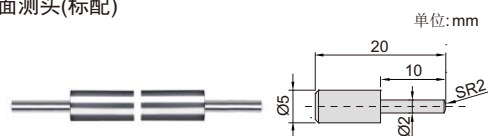


## 量爪(标配)

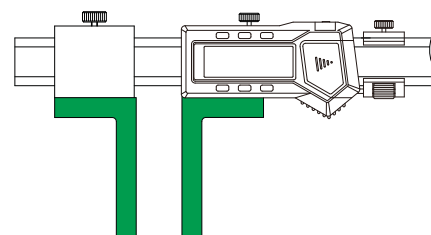

## 支架(标配)

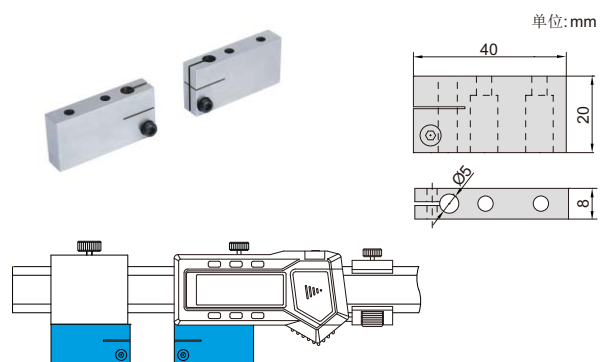

## 测深限位块(标配)

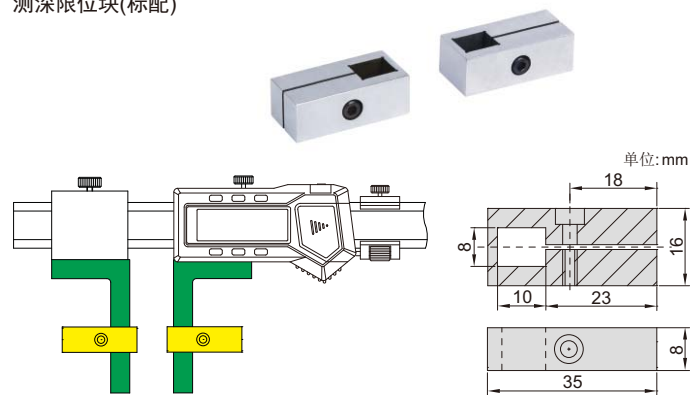

## 多功能测头7392<sup>\*</sup>(选配, 详见页码62)



<sup>\*</sup>当使用这些测头时需选配测头座(型号1526-T101)

## 球测头7391<sup>\*</sup>(选配, 详见页码62)



## 螺纹测头7381<sup>\*</sup>, 7321<sup>\*</sup>(选配, 详见页码62)

