


双钩数显深度尺

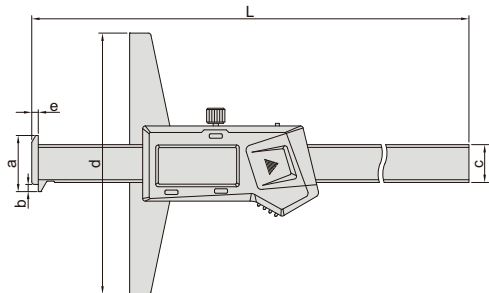

1144-150A

- 符合GB/T深度卡尺国家标准
- 分辨率: 0.01mm/0.0005"
- 按键: 开/关, 置零, 公/英制转换
- 自动关机, 拉动尺身开机
- CR2032电池, 数据传输, 不锈钢尺身

带数据接口

型号	测量范围	精度	L	d	a	b	c	e	数据传输
1144-150A	0-150mm/0-6"	±0.03mm	233mm	100mm	21.5mm	3.5mm	14.5mm	2.5mm	数据线(型号7315-21, 7302-21, 选配)
1144-200A	0-200mm/0-8"	±0.03mm	283mm	100mm	21.5mm	3.5mm	14.5mm	2.5mm	数据线(型号7315-21, 7302-21, 选配)
1144-300A	0-300mm/0-12"	±0.03mm	383mm	150mm	21.5mm	3.5mm	14.5mm	2.5mm	数据线(型号7315-21, 7302-21, 选配)
1144-500A	0-500mm/0-20"	±0.05mm	585mm	150mm	25mm	5mm	15mm	3mm	数据线(型号7315-22, 7302-22, 选配)
1144-5001A	0-500mm/0-20"	±0.05mm	585mm	200mm	25mm	5mm	15mm	3mm	数据线(型号7315-22, 7302-22, 选配)
1144-1000A	0-1000mm/0-40"	±0.07mm	1188mm	150mm	32mm	7mm	18mm	4mm	数据线(型号7315-22, 7302-22, 选配)
1144-10001A	0-1000mm/0-40"	±0.07mm	1188mm	200mm	32mm	7mm	18mm	4mm	数据线(型号7315-22, 7302-22, 选配)
1144-10002A	0-1000mm/0-40"	±0.07mm	1188mm	250mm	32mm	7mm	18mm	4mm	数据线(型号7315-22, 7302-22, 选配)

内置无线(需选配接收器, 型号7315-2/3/6/7/8/9)

(mm)

型号	测量范围	精度	L	d	a	b	c	e
1144-150AWL	0-150mm/0-6"	±0.03mm	233	100	21.5	3.5	14.5	2.5
1144-200AWL	0-200mm/0-8"	±0.03mm	283	100	21.5	3.5	14.5	2.5
1144-300AWL	0-300mm/0-12"	±0.03mm	383	150	21.5	3.5	14.5	2.5
1144-500AWL	0-500mm/0-20"	±0.05mm	585	150	25	5	15	3
1144-5001AWL	0-500mm/0-20"	±0.05mm	585	200	25	5	15	3

