
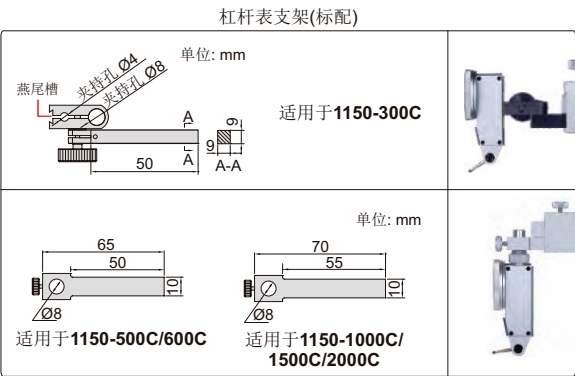


数显高度尺

数据
传输



- 符合JJG高度卡尺国家计量检定规程
- 分辨率: 0.01mm/0.0005"
- 按键: 开/关, 置零, 公/英制转换, 相对/绝对测量转换, 数值保持, 设置公差, 设置初始值
- 硬质合金划线头
- 不锈钢尺身(底座除外)
- LR44 电池
- 数据传输
- 配杠杆表支架
- 配防尘罩
- 可选附件: 木盒, 无线发射器(型号**7315-1150**), 数据传输线(型号**7302-SPC7**, 键盘信号), 角度尺夹持块(型号**2372-CLAMP**, 仅适用于**1150-300C**)

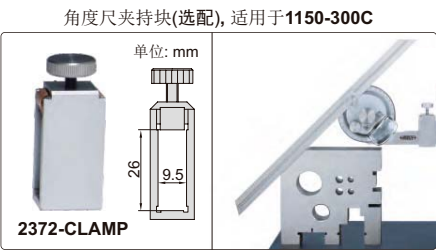

1150-1000C

1150-500C

1150-300C

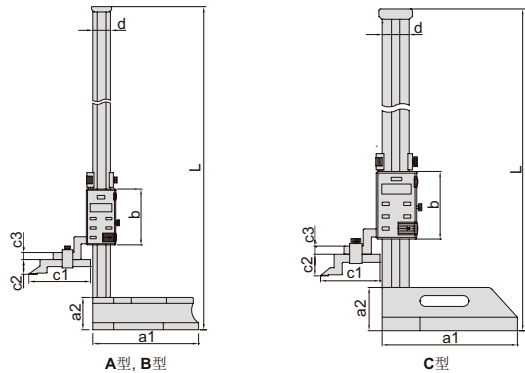

型号	测量范围	类型	精度	L	a1	a2	b	c1	c2	c3	d	e	f
1150-300C	0-300mm/0-12"	A	±0.04mm	485mm	138mm	45mm	95mm	80mm	30mm	10mm	28mm	9mm	9mm
1150-500C	0-500mm/0-20"	B	±0.05mm	720mm	180mm	55mm	95mm	103mm	25mm	12mm	30mm	10mm	12mm
1150-600C	0-600mm/0-24"	B	±0.05mm	820mm	180mm	55mm	95mm	103mm	25mm	12mm	30mm	10mm	12mm
1150-1000C	0-1000mm/0-40"	C	±0.07mm	1275mm	250mm	80mm	125mm	110mm	39mm	15mm	50mm	10mm	15mm
1150-1500C	0-1500mm/0-60"	C	±0.11mm	1790mm	280mm	80mm	125mm	110mm	39mm	15mm	50mm	10mm	15mm
1150-2000C	0-2000mm/0-80"	C	±0.15mm	2290mm	280mm	80mm	125mm	110mm	39mm	15mm	50mm	10mm	15mm