
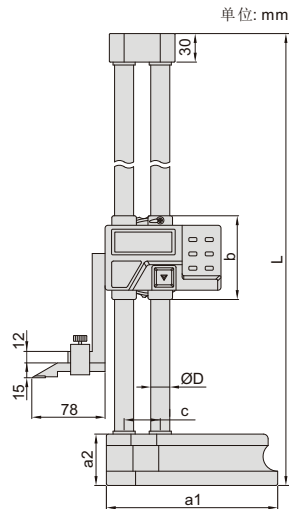


数据  
传输

# 数显高度尺


- 符合JJG高度卡尺国家计量检定规程
- 分辨率: 0.01mm/0.0005"
- 按键: 开/关, 置零, 公/英制转换, 数据保持  
设置初始值, 相对/绝对测量转换
- 自动关机, 拉动机身开机
- 硬质合金划线头, 不锈钢尺身
- CR2032电池
- 带手轮
- 配杠杆表支架
- 数据传输, 配防尘罩
- 可选附件: 无线发射器(型号**7315-1151**),  
数据传输线(型号**7302-1151**, 键盘信号),  
角度尺夹持块(型号**2372-CLAMP**), 木盒




1151-300A

型号	测量范围	精度	L	a1	a2	b	c	ØD
1151-300A	0-300mm	±0.04mm	475	135	43	84	33	15
1151-450A	0-450mm	±0.05mm	660	180	54	88	38	20
1151-600A	0-600mm	±0.05mm	810	180	54	88	38	20

角度尺夹持块(选配)

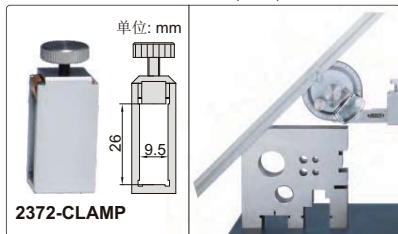

杠杆表支架(标配)

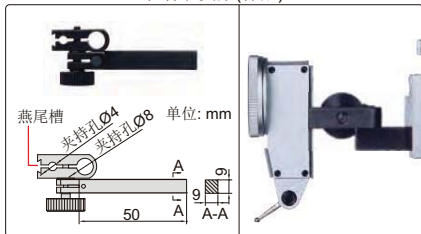

手轮(背面)