




数显油封槽径卡尺

数据
传输


1179-300和1179-300WL
预置按键




1179-300



1179-600

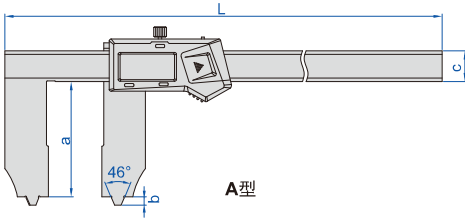


A型

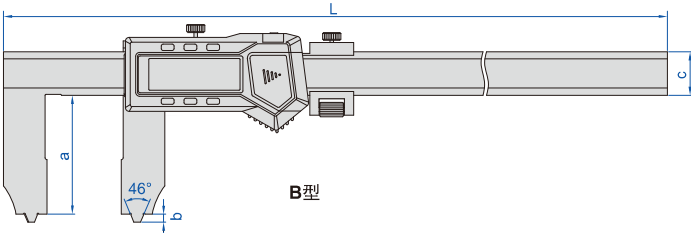


B型


- 符合企业标准
- 不防水
- 用于测量法兰密封槽
- 分辨率: 0.01mm/0.0005"
- 法兰油封槽角度: 23°
- 按键: 开/关, 设置数值, 公/英制转换, 设置初始值
- CR2032电池
- 数据传输
- 不锈钢尺身




测量环槽外径



测量环槽内径



d和e
需要加到测量读数上



适合测量23°法兰油封槽

带数据接口

(mm)

型号	测量范围(环槽内径)	测量范围(环槽外径)	精度	类型	L	a	b	c	d	e	数据传输
1179-300	10-300mm/0.4-12"	25-300mm/1-12"	±0.06mm	A	410	63.5	4.5	17	25	10	数据线(型号7315-25 需选配接收器, 7302-21, 选配)
1179-600	10-600mm/0.4-24"	25-600mm/1-24"	±0.07mm	B	770	65.5	4.5	24	25	10	数据线(型号7315-22 需选配接收器, 7302-22, 选配)
1179-1000	15-1000mm/0.6-40"	30-1000mm/1.2-40"	±0.09mm	B	1220	90	5	31	30	15	

内置无线(需选配接收器, 型号7315-2/3/6/7/8/9)

(mm)

型号	测量范围(环槽内径)	测量范围(环槽外径)	精度	类型	L	a	b	c	d	e
1179-300WL	10-300mm/0.4-12"	25-300mm/1-12"	±0.06mm	A	410	63.5	4.5	17	25	10
1179-600WL	10-600mm/0.4-24"	25-600mm/1-24"	±0.07mm	B	770	65.5	4.5	24	25	10