





2151-35

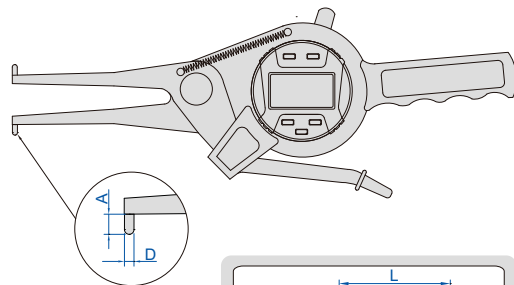

(mm)

型号	测量范围	分辨率	精度	L	A	D
2151-35	15-35mm/0.6-1.4"	0.01mm/0.0005"	±0.04mm	<50	3	Ø3
2151-AL35	15-35mm/0.6-1.4"	0.01mm/0.0005"	±0.04mm	<200	3	Ø3
2151-55	35-55mm/1.4-2.2"	0.01mm/0.0005"	±0.04mm	<80	6	Ø3
2151-AL55	35-55mm/1.4-2.2"	0.01mm/0.0005"	±0.04mm	<250	8	Ø3
2151-75	55-75mm/2.2-3"	0.01mm/0.0005"	±0.04mm	<90	8	Ø3
2151-AL75	55-75mm/2.2-3"	0.01mm/0.0005"	±0.04mm	<250	8	Ø3
2151-95	75-95mm/3-3.8"	0.01mm/0.0005"	±0.04mm	<100	8	Ø3
2151-115	95-115mm/3.8-4.6"	0.01mm/0.0005"	±0.04mm	<120	10	Ø3.2
2151-135	115-135mm/4.6-5.4"	0.01mm/0.0005"	±0.04mm	<120	10	Ø3.2

- 符合JJF带表卡规国家计量技术规范
- 硬质合金测头
- 模拟指针显示
- 带采集按钮与指示灯
- 显示屏可旋转320°
- 按键功能: 开/关, 置零, 最大值/最小值/跳动, 设置初始值, 设置公差并显示Go/No-Go, 公/英制转换, 测量方向转换, 数据输出, 相对/绝对测量转换
- CR2032电池, 自动关机(关机时间可调)
- 数据传输
- 可选附件: 数据传输线(型号7315-50M, 7302-50M)