



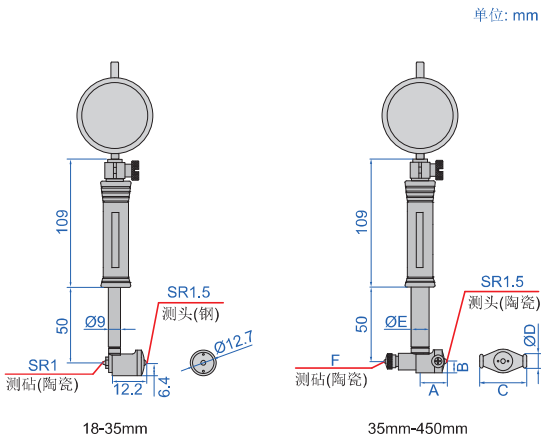


短臂百分内径量表

注意: 千分表不适用

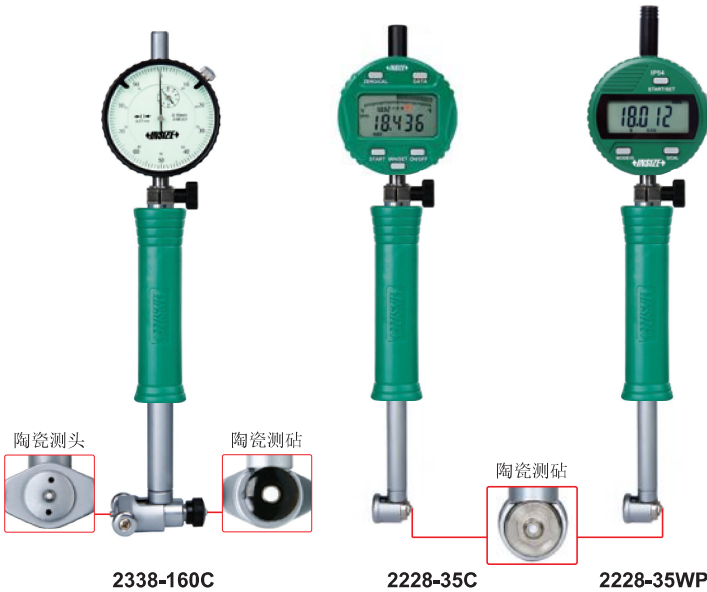

- 符合JJF内径表国家计量技术规范
- 测头和测砧为陶瓷材质(其中测量范围18-35mm的测头为钢材质)
- 测杆长度比2322/2122短, 重量更轻, 在狭小空间或桌面操作时更便捷
- 可选附件: 内径量表设定器, 校对环规(6312系列)

(mm)						
测量范围	A	B	C	ØD	ØE	F
35-60mm	22	9	27	13	12.8	SR2
50-100mm	26	9	35	13	12.8	SR2
50-160mm	26	9	35	13	12.8	SR2
100-160mm	26	9	35	13	12.8	SR2
160-250mm	56.5	13	74.5	15	14.5	SR2
250-450mm	86.5	15	101.5	15	14.5	SR2.5

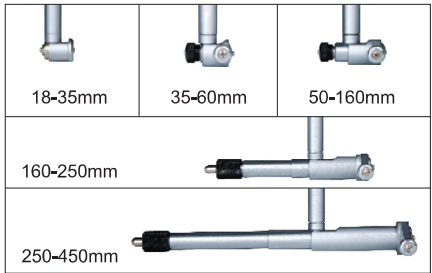


配机械百分表

型号	测量范围	表头	精度	重复精度
2338-35C	18-35mm	机械百分表, 型号2308-10FAC, 测量范围10mm, 分度值0.01mm	±0.015mm	0.003mm
2338-60C	35-60mm		±0.018mm	0.003mm
2338-100C	50-100mm		±0.018mm	0.003mm
2338-160C	50-160mm		±0.018mm	0.003mm
2338-161C	100-160mm		±0.018mm	0.003mm
2338-250C	160-250mm		±0.018mm	0.003mm
2338-450C	250-450mm		±0.018mm	0.003mm

配数显百分表(数据传输线型号**7315-51B**需选配接收器, **7302-40M**, 选配)

型号	测量范围	表头	精度	重复精度
2228-35	18-35mm	数显百分表, 型号 2108-10F , 测量范围12.7mm/0.5", 分辨率0.002mm/0.0001" (可切换为: 0.01mm/0.0005")	±0.015mm	0.003mm
2228-60	35-60mm		±0.018mm	0.003mm
2228-100	50-100mm		±0.018mm	0.003mm
2228-160	50-160mm		±0.018mm	0.003mm
2228-161	100-160mm		±0.018mm	0.003mm
2228-250	160-250mm		±0.018mm	0.003mm
2228-450	250-450mm		±0.018mm	0.003mm

配数显百分表



配防水数显百分表(数据传输线型号**7315-51B**需选配接收器, **7302-40M**, 选配)

型号	测量范围	表头	精度	重复精度
2228-35WP	18-35mm	防水数显百分表, 型号 2137-10F , 测量范围12.7mm/0.5", 防尘/防水等级IP54, 分辨率0.002mm/0.0001" (可切换为: 0.01mm/0.0005")	±0.015mm	0.003mm
2228-60WP	35-60mm		±0.018mm	0.003mm
2228-100WP	50-100mm		±0.018mm	0.003mm
2228-160WP	50-160mm		±0.018mm	0.003mm
2228-161WP	100-160mm		±0.018mm	0.003mm
2228-250WP	160-250mm		±0.018mm	0.003mm
2228-450WP	250-450mm		±0.018mm	0.003mm

配防水数显百分表

