


齿轮量表

INSIZE PLUS



视频

- 符合企业标准
- 硬质合金球测头, 直径精度2μm
- 可选附件: 球测头, 螺纹转换件, 内径量表长手柄(7352系列)

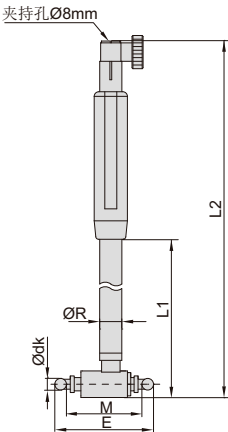

相关产品: 齿轮内测千分尺
(型号3637, 3638系列)

型号	测量范围(M)	精度 (不含表头)	重复精度 (不含表头)	ØR	L1	L2	测头安装 螺纹
2428-12 *	8-12mm	2μm	0.5μm	5	100	165	M1.6
2428-22 *	12-22mm	2μm	0.5μm	5	102	168	M1.6
2428-55 *	22-55mm	2μm	0.5μm	8	110	204	M2.5
2428-250 *	55-250mm	2μm	0.5μm	12	177	290	M4
2428-510 *	100-510mm	2μm	0.5μm	18	235	363	M4

*带生产厂检验证书

球测头(选配)

球测头直径 Ødk	2428-12	2428-22	2428-55	2428-250	2428-510
	测头螺纹M1.6	测头螺纹M1.6	测头螺纹M2.5	测头螺纹M4	测头螺纹M4
	球测头型号	球测头型号	球测头型号	球测头型号	球测头型号
1mm	2428-A1	2428-E1	2428-B1	2428-C1	2428-C1
1.5mm	2428-A1D5	2428-E1D5	2428-B1D5	2428-C1D5	2428-C1D5
2mm	2428-A2	2428-E2	2428-B2	2428-C2	2428-C2
2.5mm	—	2428-E2D5	2428-B2D5	2428-C2D5	2428-C2D5
3mm	—	2428-E3	2428-B3	2428-C3	2428-C3
3.5mm	—	2428-E3D5	2428-B3D5	2428-C3D5	2428-C3D5
4mm	—	2428-E4	2428-B4	2428-C4	2428-C4
4.5mm	—	—	2428-B4D5	2428-C4D5	2428-C4D5
5mm	—	—	2428-B5	2428-C5	2428-C5
5.5mm	—	—	2428-B5D5	2428-C5D5	2428-C5D5
6mm	—	—	2428-B6	2428-C6	2428-C6
6.5mm	—	—	2428-B6D5	2428-C6D5	2428-C6D5
7mm	—	—	2428-B7	2428-C7	2428-C7
7.5mm	—	—	2428-B7D5	2428-C7D5	2428-C7D5
8mm	—	—	2428-B8	2428-C8	2428-C8
8.5mm	—	—	2428-B8D5	2428-C8D5	2428-C8D5
9mm	—	—	2428-B9	2428-C9	2428-C9
9.5mm	—	—	2428-B9D5	2428-C9D5	2428-C9D5
10mm	—	—	2428-B10	2428-C10	2428-C10

螺纹转换件(选配)

型号	转换螺纹	备注
2428-D1	M1.6/M2.5	如2428-E1配合2428-D1可代替2428-B1
2428-D2	M2.5/M4	如2428-B1配合2428-D2可代替2428-C1



表头选配




2428-55

测头接杆(标配)



2428-55的测头接杆

使用方法

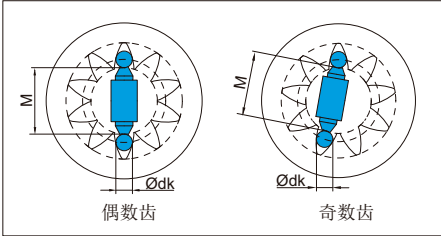

球测头(选配), 成对提供

