




千分内径量表

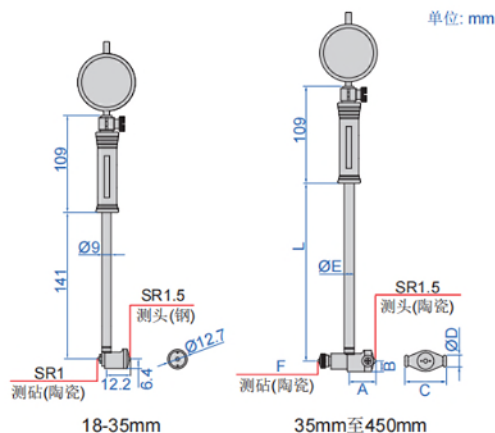

- 符合JJF内径表国家计量技术规范
- 测头和测砧为陶瓷材质(其中测量范围18-35mm的测头为钢材质)
- 可选附件: 内径量表设定器, 校对环规(6312系列)

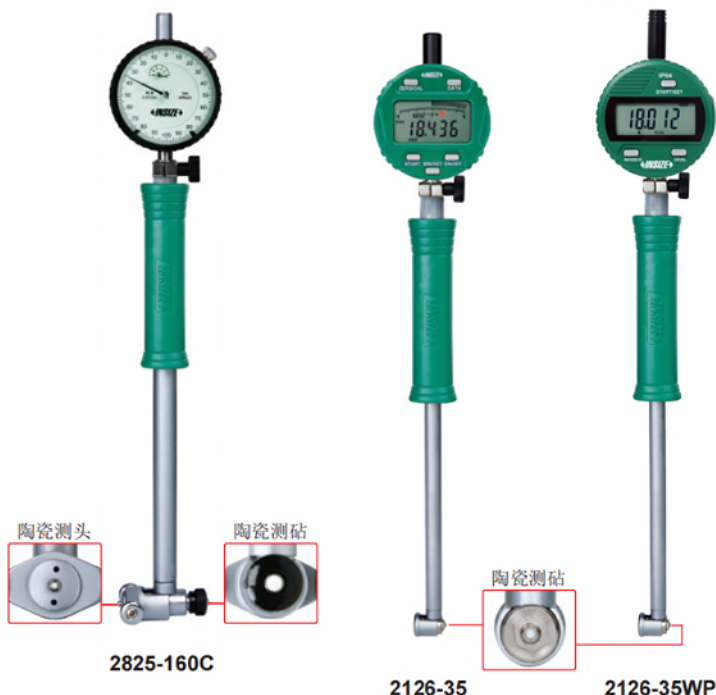

测量范围	A	B	C	ØD	ØE	F	L
35-60mm	22	9	27	13	12.8	SR2	141
50-100mm	26	9	35	13	12.8	SR2	141
50-160mm	26	9	35	13	12.8	SR2	141
100-160mm	26	9	35	13	12.8	SR2	141
160-250mm	56.5	13	74.5	15	14.5	SR2	241
250-450mm	86.5	15	101.5	15	14.5	SR2.5	241

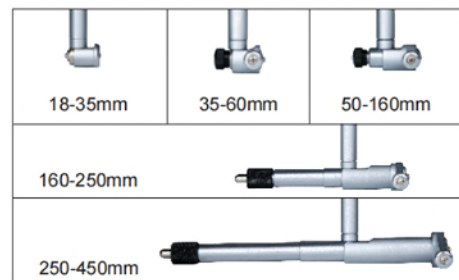


配机械千分表

型号	测量范围	表头	精度	重复精度
2825-35C	18-35mm	机械千分表, 型号2313-1FAC, 测量范围1mm, 分度值0.001mm	±0.007mm	0.0015mm
2825-60C	35-60mm		±0.007mm	0.0015mm
2825-100C	50-100mm		±0.007mm	0.0015mm
2825-160C	50-160mm		±0.007mm	0.0015mm
2825-161C	100-160mm		±0.007mm	0.0015mm
2825-250C	160-250mm		±0.007mm	0.0015mm
2825-450C	250-450mm		±0.007mm	0.0015mm

配数显千分表(数据传输线型号7315-51B,7302-40M, 选配)

型号	测量范围	表头	精度	重复精度
2126-35	18-35mm	数显千分表, 型号2108-101F, 测量范围12.7mm/0.5", 分辨率0.001mm/0.0005"	±0.007mm	0.002mm
2126-60	35-60mm		±0.007mm	0.002mm
2126-100	50-100mm		±0.007mm	0.002mm
2126-160	50-160mm		±0.007mm	0.002mm
2126-161	100-160mm		±0.007mm	0.002mm
2126-250	160-250mm		±0.007mm	0.002mm
2126-450	250-450mm		±0.007mm	0.002mm



配防水数显千分表(数据传输线型号**7315-51B,7302-40M**, 选配)

型号	测量范围	表头	精度	重复精度
2126-35WP	18-35mm	防水数显千分表, 型号 2137-101F , 测量范围12.7mm/0.5", 防尘/防水等级IP54, 分辨率0.001mm/0.00005"	±0.007mm	0.002mm
2126-60WP	35-60mm		±0.007mm	0.002mm
2126-100WP	50-100mm		±0.007mm	0.002mm
2126-160WP	50-160mm		±0.007mm	0.002mm
2126-161WP	100-160mm		±0.007mm	0.002mm
2126-250WP	160-250mm		±0.007mm	0.002mm
2126-450WP	250-450mm		±0.007mm	0.002mm

