



2962-609

- 符合企业标准
- 测量倒角孔的口端直径
- 分辨率: 0.01mm/0.0005"
- 直接读数(口端直径), 无需计算
- 氧化钛镀层, 硬度高2200HV, 耐磨防锈
- 可选附件: 数据传输线
(型号7315-50M, 7302-40M)

倒角孔角度 $\alpha=90^\circ$


型号	测量范围 $\varnothing D$	α	精度
2962-209*	1-20mm	90°	±0.02mm
2962-409*	20-40mm	90°	±0.02mm
2962-609*	40-60mm	90°	±0.02mm
2962-809*	60-80mm	90°	±0.02mm
2962-1009*	80-100mm	90°	±0.02mm
2962-1209*	100-120mm	90°	±0.02mm

倒角孔角度 $\alpha=127^\circ$


型号	测量范围 $\varnothing D$	α	精度
2962-207*	1-20mm	127°	±0.02mm
2962-407*	20-40mm	127°	±0.02mm
2962-607*	40-60mm	127°	±0.02mm
2962-807*	60-80mm	127°	±0.02mm
2962-1007*	80-100mm	127°	±0.02mm
2962-1207*	100-120mm	127°	±0.02mm

*带生产厂检验证书

测量原理

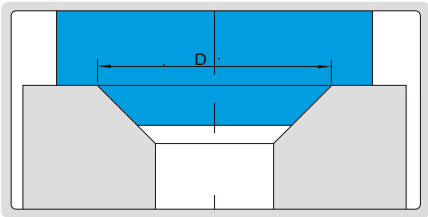

测量倒角孔的口端直径



倒角孔角度 $\alpha=60^\circ$

型号	测量范围 $\varnothing D$	α	精度
2962-126*	1-10mm	60°	±0.02mm
2962-216*	10-20mm	60°	±0.02mm
2962-316*	20-30mm	60°	±0.02mm
2962-416*	30-40mm	60°	±0.02mm
2962-516*	40-50mm	60°	±0.02mm
2962-616*	50-60mm	60°	±0.02mm
2962-716*	60-70mm	60°	±0.02mm
2962-816*	70-80mm	60°	±0.02mm
2962-916*	80-90mm	60°	±0.02mm
2962-1016*	90-100mm	60°	±0.02mm
2962-1116*	100-110mm	60°	±0.02mm
2962-1216*	110-120mm	60°	±0.02mm