


- 符合JJG外径千分尺国家计量检定规程
- 分辨率: 0.001mm/0.00005"
- 按键: 开/关, 初始值设置, 公/英制转换, 数据输出
- 带球测头
- 自动关机
- 硬质合金测量面
- 棘轮套测力
- 配标准杆(除0-25mm/0-1"外)
- 可选附件: 数据传输线  
(型号7315-30, 7302-30)



3102-25C

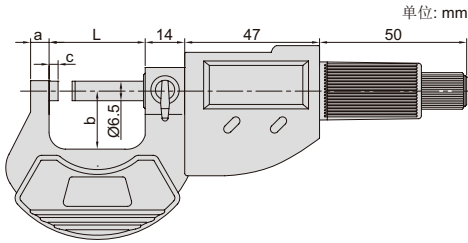

型号	测量范围	精度	L	a	b	c
3102-25C*	0-25mm/0-1"	±2μm	32	6	24	3
3102-50C*	25-50mm/1-2"	±2μm	57	8	32	3
3102-75C*	50-75mm/2-3"	±3μm	82	8	45	3
3102-100C*	75-100mm/3-4"	±3μm	107	10	57	3
3102-125C	100-125mm/4-5"	±3μm	133	10	70	3
3102-150C	125-150mm/5-6"	±3μm	158	10	82	3
3102-175C	150-175mm/6-7"	±4μm	183	12	95	5.5
3102-200C	175-200mm/7-8"	±4μm	209	12	107	5.5

型号	测量范围	包含的千分尺	包装
3102-753C*	0-75mm/0-3"	3102-25C, 3102-50C, 3102-75C	吹塑盒
3102-1004C*	0-100mm/0-4"	3102-25C, 3102-50C, 3102-75C, 3102-100C	吹塑盒
3102-1506C	0-150mm/0-6"	3102-25C, 3102-50C, 3102-75C, 3102-100C, 3102-125C, 3102-150C	铝盒



3102-753C



3102-1506C

\*带生产厂检验证书