

# 数显外径千分尺(基础型, 无数据传输)




注意: 无数据传输

- 符合JJG外径千分尺国家计量检定规程
- 分辨率: 0.001mm/0.00005"
- 按键: 开/关, 初始值设置, 公/英制转换, 相对/绝对测量转换
- 无数据传输
- 自动关机
- 硬质合金测量面
- 棘轮套测力
- 带球测头
- 配标准杆(除0-25mm/0-1"外)



3109-25AC

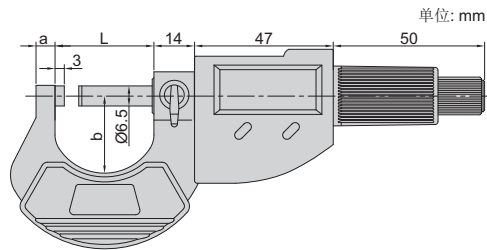

## 单支

型号	测量范围	精度	L	a	b
3109-25AC*	0-25mm/0-1"	±2μm	32mm	6mm	28mm
3109-50AC*	25-50mm/1-2"	±2μm	57mm	8mm	37mm
3109-75AC*	50-75mm/2-3"	±3μm	82mm	8mm	50mm
3109-100AC*	75-100mm/3-4"	±3μm	107mm	10mm	61mm
3109-125AC	100-125mm/4-5"	±3μm	132mm	10mm	73mm
3109-150AC	125-150mm/5-6"	±3μm	157mm	10mm	85mm
3109-175AC	150-175mm/6-7"	±4μm	182mm	20mm	104mm
3109-200AC	175-200mm/7-8"	±4μm	207mm	20mm	117mm
3109-225AC	200-225mm/8-9"	±4μm	234mm	20mm	130mm
3109-250AC	225-250mm/9-10"	±4μm	260mm	20mm	143mm
3109-275AC	250-275mm/10-11"	±5μm	285mm	20mm	155mm
3109-300AC	275-300mm/11-12"	±5μm	310mm	20mm	168mm



## 套装

型号	测量范围	包含的千分尺	包装
3109-753AC*	0-75mm/0-3"	3109-25AC, 3109-50AC, 3109-75AC	吹塑盒
3109-1004AC*	0-100mm/0-4"	3109-25AC, 3109-50AC, 3109-75AC, 3109-100AC	吹塑盒
3109-1506AC	0-150mm/0-6"	3109-25AC, 3109-50AC, 3109-75AC, 3109-100AC, 3109-125AC, 3109-150AC	铝盒
3109-3006AC	150-300mm/6-12"	3109-175AC, 3109-200AC, 3109-225AC, 3109-250AC, 3109-275AC, 3109-300AC	铝盒

\*带生产厂检验证书



3109-753AC



3109-1506AC