

快速卡规


INSIZE PLUS

检验证书

IP54
防尘防水



3335-25

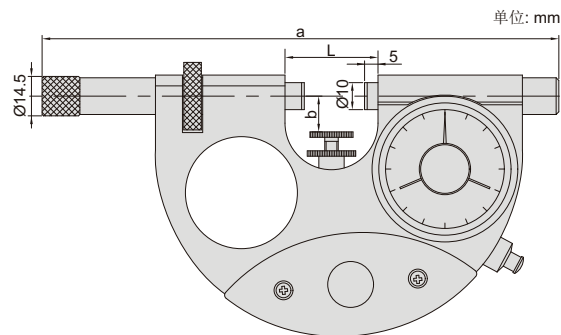

(mm)

型号	测量范围	表头			L	a	b
		测量范围	分度值	精度			
3335-25*	0-25mm	±0.07mm	1μm	±1μm	35	191	12.5
3335-252*	0-25mm	±0.14mm	2μm	±2μm	35	191	12.5
3335-50*	25-50mm	±0.07mm	1μm	±1μm	60	215	25
3335-502*	25-50mm	±0.14mm	2μm	±2μm	60	215	25
3335-75*	50-75mm	±0.07mm	1μm	±1μm	84	239	37.5
3335-752*	50-75mm	±0.14mm	2μm	±2μm	84	239	37.5
3335-100*	75-100mm	±0.07mm	1μm	±1μm	110	265	50
3335-1002*	75-100mm	±0.14mm	2μm	±2μm	110	265	50
3335-125*	100-125mm	±0.14mm	2μm	±2μm	136	291	62.5
3335-150*	125-150mm	±0.14mm	2μm	±2μm	160	315	75
3335-175*	150-175mm	±0.14mm	2μm	±2μm	186	341	87.5
3335-200*	175-200mm	±0.14mm	2μm	±2μm	210	365	100

- 符合JJG杠杆卡规国家计量检定规程
- 用于大批工件的Go/No-Go快速判断
- 测砧缩进量: 2.5mm
- 测力: 5-10N
- 硬质合金测量面
- 防尘/防水等级: IP54
- 表头零位可调节并可锁定(配锁紧扳手)
- 工作台高度可调

*带生产厂检验证书

