

定制塞规
可定制其它等级, 如H8, H9, G7
可定制直径, 如19.003mm
可定制长度, 如70mm




4128-3C



4128-50C

- 符合JJG光滑极限量规国家计量检定规程
- 包含通规和止规

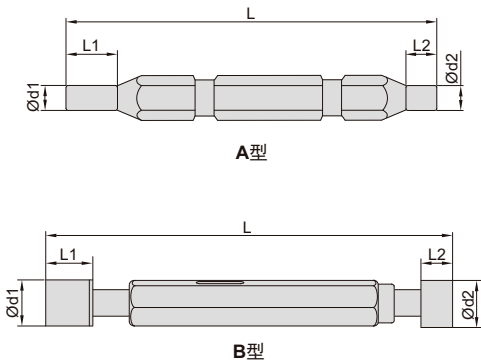

H7尺寸公差 (mm)					
直径(mm)	Ød1 通规尺寸公差 (mm)	Ød2 止规尺寸公差 (mm)	L1	L2	L
≥1, ≤1.9	+0.0010/+0.0022	+0.0088/+0.010	15	12	67
>1.9, ≤3	+0.0010/+0.0022	+0.0088/+0.010	15	12	79
>3, ≤4.7	+0.0013/+0.0027	+0.0106/+0.012	15	12	79
>4.7, ≤6	+0.0013/+0.0027	+0.0106/+0.012	15	12	88.5
>6, ≤7.1	+0.0015/+0.0033	+0.0132/+0.015	15	12	88.5
>7.1, ≤8	+0.0015/+0.0033	+0.0132/+0.015	15	12	99
>8, ≤10	+0.0015/+0.0033	+0.0132/+0.015	12	7	75
>10, ≤14	+0.0018/+0.0038	+0.0160/+0.018	12	7	82
>14, ≤18	+0.0018/+0.0038	+0.0160/+0.018	17	10	97
>18, ≤24	+0.0023/+0.0046	+0.0186/+0.021	17	12	109
>24, ≤30	+0.0023/+0.0046	+0.0186/+0.021	17	14	111
>30, ≤40	+0.0023/+0.0055	+0.0220/+0.025	20	15	115
>40, ≤50	+0.0023/+0.0055	+0.0220/+0.025	20	15	160
>50, ≤60	+0.0028/+0.0064	+0.0264/+0.030	20	15	160

H7

型号	直径(mm)	类型	型号	直径(mm)	类型	型号	直径(mm)	类型	型号	直径(mm)	类型
4128-1C*	1	A	4128-14C*	14	B	4128-27C*	27	B	4128-40C*	40	B
4128-2C*	2	A	4128-15C*	15	B	4128-28C*	28	B	4128-41C*	41	B
4128-3C*	3	A	4128-16C*	16	B	4128-29C*	29	B	4128-42C*	42	B
4128-4C*	4	A	4128-17C*	17	B	4128-30C*	30	B	4128-43C*	43	B
4128-5C*	5	A	4128-18C*	18	B	4128-31C*	31	B	4128-44C*	44	B
4128-6C*	6	A	4128-19C*	19	B	4128-32C*	32	B	4128-45C*	45	B
4128-7C*	7	A	4128-20C*	20	B	4128-33C*	33	B	4128-46C*	46	B
4128-8C*	8	A	4128-21C*	21	B	4128-34C*	34	B	4128-47C*	47	B
4128-9C*	9	B	4128-22C*	22	B	4128-35C*	35	B	4128-48C*	48	B
4128-10C*	10	B	4128-23C*	23	B	4128-36C*	36	B	4128-49C*	49	B
4128-11C*	11	B	4128-24C*	24	B	4128-37C*	37	B	4128-50C*	50	B
4128-12C*	12	B	4128-25C*	25	B	4128-38C*	38	B	4128-52C*	52	B
4128-13C*	13	B	4128-26C*	26	B	4128-39C*	39	B	4128-55C*	55	B
									4128-60C*	60	B

*带生产厂检验证书