





精密塞规
INSIZE PLUS
德国制造



表头选配

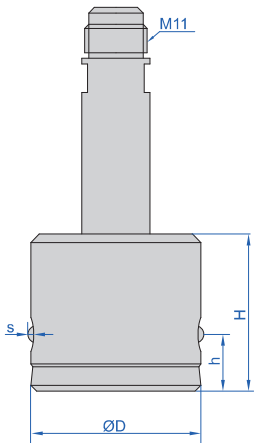

测量原理

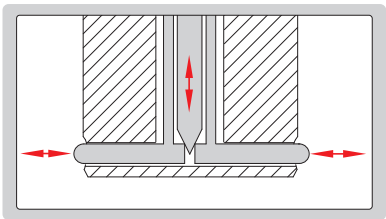

■ 符合企业标准

技术参数 (mm)									
测量范围(ØD)	2-3	3.1-4	4.1-6	6.1-9	9.1-12	12.1-20	20.1-40	40.1-60	60.1-130
类型	A	A	A	A	A	A	A	A	A
测头行程(s)	0.15	0.15	0.15	0.2	0.2	0.2	0.2	0.2	0.2
测头高度(h)	1	1.5	1.5	2.5	2.5	2.5	3.5	3.5	4
衬套高度(H)	17.5	26	10	15	15	15	20	28	33
重复精度	0.001	0.001	0.001	0.0005	0.0005	0.0005	0.0005	0.0005	0.001



测头, 通用型, 衬套不镀铬(被测孔公差≥10μm)

型号	规格
4653-A116D027027	116.027±0.027mm
4653-A14D024024	14.024±0.024mm
4653-A16D009009	16.009±0.009mm
4653-A16D04038	16.04±0.038mm
4653-A22D27025	22.27±0.025mm
4653-A2D5105-FB	2.51±0.05mm
4653-A3D305	3.3±0.05mm
4653-A44D442008	44.442±0.008mm
4653-A59D023023	59.023±0.023mm
4653-A77D6603	77.66±0.03mm
4653-A7D962011	7.962±0.011mm
4653-A8D025008	8.025±0.008mm

校对环规

型号	规格
6312-116D027	116.027mm
6312-14D024	14.024mm
6312-16D009	16.009mm
6312-16D04	16.04mm
6312-22D27	22.27mm
6312-2D51	2.51mm
6312-3D3	3.3mm
6312-44D442	44.442mm
6312-59D023	59.023mm
6312-77D66	77.66mm
6312-7D962	7.962mm
6312-8D025	8.025mm



伸缩按钮
防止测头磨损

手柄

型号	长度(L)	直径(ØD)	备注
4653-150	45mm	12mm	不可伸缩
4653-1105	105mm	12mm	不可伸缩
4653-1235	235mm	12mm	不可伸缩
4653-2145	145mm	18mm*	不可伸缩
4653-2235	235mm	18mm*	不可伸缩
4653-H70	70mm	12mm	可伸缩

*测量范围大于60mm时, 建议使用18mm加粗手柄



4653-G



4653-J

深度环

型号	适用精密塞规
4653-G□□□□□	3.0-60mm
4653-J□□□□□	30-130mm

深度环型号举例: (mm)

型号	适用精密塞规
4653-G22H7	22H7




设定测量深度



设定测量深度

手柄延长杆

型号	长度(H)
4653-R50	50mm
4653-R100	100mm
4653-R250	250mm
4653-R500	500mm



单位: mm

M11

H

M11



电感测头衬套


型号
4653-F110

应用



90°转接头

型号
4653-K1



单位: mm

应用



底座


型号	夹持孔径
4663-STAND	Ø12mm
4663-STAND1	Ø18mm



浮动夹持手柄

型号	长度(L)	直径(ØD)	浮动范围	适用量程
4653-M20	26mm	Ø20mm	±0.4mm	6-20mm
4653-M30	29.5mm	Ø30mm	±0.7mm	20-60mm
4653-M50	58mm	Ø50mm	±0.75mm	60-130mm

适合自动化测量时使用



单位: mm

SW15

ØD

M11

应用

