



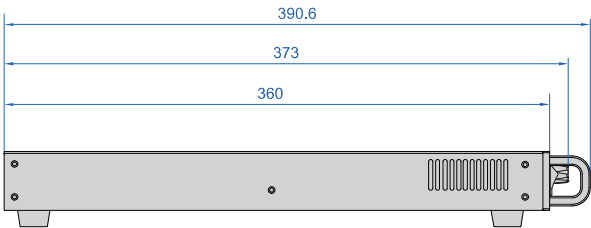

大功率直流电源

- 符合JJF直流稳定电源国家计量校准规范
- 高精度低纹波
- 过压、过流、过功率、过温保护
- 1/2 1U机箱, 适合系统集成
- 远端端口补偿
- 多种通讯接口

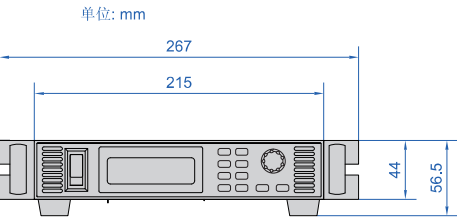

技术参数

型号		9915-NCK61		9915-NCK62		9915-NCK63		9915-NCK91		9915-NCK92		9915-NC1K1	
额定输出电压		0~30V		0~60V		0~100V		0~30V		0~60V		0~100V	
额定输出电流		0~20A		0~10A		0~6A		0~30A		0~15A		0~10A	
最大输出功率		600W						900W				1000W	
电压	设定分辨率	1mV				10mV		1mV				10mV	
	设定精度	≤0.05%+0.2%FS		≤0.05%+0.1%FS				≤0.05%+0.2%FS		≤0.05%+0.1%FS			
	回读分辨率	1mV				10mV		1mV				10mV	
	回读精度	≤0.05%+0.2%FS		≤0.05%+0.1%FS				≤0.05%+0.2%FS		≤0.05%+0.1%FS			
	负载调节率	≤0.05%+20mV		≤0.1%+20mV		≤0.1%+30mV		≤0.05%+20mV		≤0.1%+20mV		≤0.1%+30mV	
	电源调节率	≤0.05%+20mV		≤0.1%+20mV		≤0.1%+30mV		≤0.05%+20mV		≤0.1%+20mV		≤0.1%+30mV	
	纹波	≤30mVrms		≤60mVrms		≤80mVrms		≤30mVrms		≤60mVrms		≤80mVrms	
电流	设定分辨率	1mA											
	设定精度	≤0.1%+0.1%FS		≤0.1%+0.5%FS				≤0.1%+0.1%FS		≤0.1%+0.5%FS			
	回读分辨率	1mA											
	回读精度	≤0.1%+0.2%FS		≤0.1%+0.5%FS				≤0.1%+0.2%FS		≤0.1%+0.5%FS			
	负载调节率	≤0.05%+20mA		≤0.1%+20mA		≤0.1%+30mA		≤0.05%+20mA		≤0.1%+20mA		≤0.1%+30mA	
	电源调节率	≤0.05%+20mA		≤0.1%+20mA		≤0.1%+30mA		≤0.05%+20mA		≤0.1%+20mA		≤0.1%+30mA	
	纹波	≤30mArms		≤60mArms		≤80mArms		≤30mArms		≤60mArms		≤80mArms	
工作条件		温度: 0°C~40°C, 湿度: 20%RH~80%RH											
存储条件		温度: -10°C~55°C, 湿度: 10%RH~90%RH											
散热方式		风冷											
电源		220V±10%, 50Hz/60Hz											
尺寸 (长×宽×高)		215x360x44mm											
重量		4kg											