





大功率直流电源

- 符合JJF直流稳定电源国家计量校准规范
- 高精度低纹波
- 过压、过流、过功率、过温保护
- 1/2 1U机箱, 适合系统集成
- 远端端口补偿
- 多种通讯接口
- 可按客户需求定制规格



单位: mm

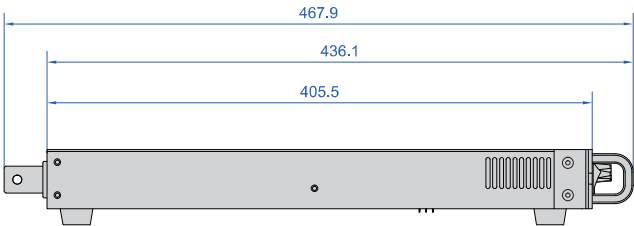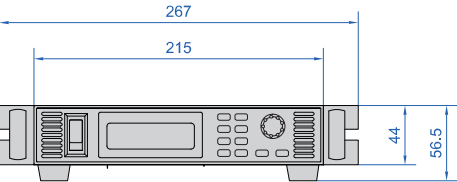

技术参数

型号		9916-HC1K81	9916-HC1K82	9916-HC1K83	9916-HC1K84	9916-HC1K85
额定输出电压		0~30V	0~60V	0~100V	0~150V	0~300V
额定输出电流		0~60A	0~30A	0~18A	0~12A	0~6A
最大输出功率		1800W				
电压	设定分辨率	1mV		10mV		
	设定精度	≤0.05%+0.2%FS	≤0.05%+0.1%FS			≤0.05%+0.05%FS
	回读分辨率	1mV		10mV		
	回读精度	≤0.05%+0.2%FS	≤0.05%+0.1%FS			≤0.05%+0.05%FS
	负载调节率	≤0.05%+20mV	≤0.1%+20mV	≤0.1%+30mV		
	电源调节率	≤0.05%+20mV	≤0.1%+20mV	≤0.1%+30mV		
	纹波	≤30mVrms	≤60mVrms	≤80mVrms	≤100mVrms	≤150mVrms
电流	设定分辨率	1mA				
	设定精度	≤0.1%+0.05%FS		≤0.1%+0.1%FS	≤0.1%+0.2%FS	≤0.05%+0.5%FS
	回读分辨率	1mA				
	回读精度	≤0.1%+0.05%FS		≤0.1%+0.1%FS	≤0.1%+0.2%FS	≤0.1%+0.5%FS
	负载调节率	≤0.05%+20mA	≤0.1%+20mA	≤0.1%+30mA		
	电源调节率	≤0.05%+20mA	≤0.1%+20mA	≤0.1%+30mA		
	纹波	≤30mArms	≤60mArms	≤80mArms	≤100mArms	≤300mArms
工作条件		温度: 0℃~40℃, 湿度: 20%RH~80%RH				
存储条件		温度: -10℃~55℃, 湿度: 10%RH~90%RH				
散热方式		风冷				
电源		220V±10%, 50Hz/60Hz				
尺寸 (长×宽×高)		215x405.5x44mm				
重量		4.5kg				