





大功率直流电源

- 符合JJF直流稳定电源国家计量校准规范
- 高精度低纹波
- 过压、过流、过功率、过温保护
- 1/2 2U机箱, 适合系统集成
- 远端端口补偿
- 多种通讯接口
- 可按客户需求定制规格



单位: mm

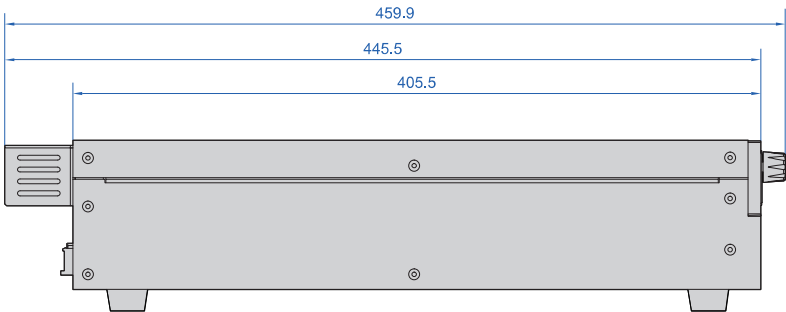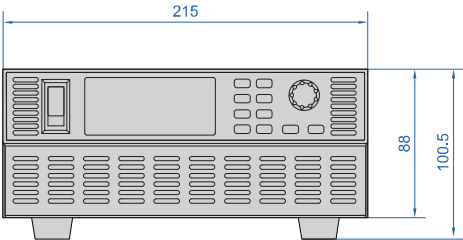

技术参数

型号		9917-FC3K61	9917-FC3K62	9917-FC3K63	9917-FC3K64	9917-FC3K65
额定输出电压		0~30V	0~60V	0~100V	0~150V	0~300V
额定输出电流		0~120A	0~60A	0~36A	0~24A	0~12A
最大输出功率		3600W				
电压	设定分辨率	1mV		10mV		
	设定精度	≤0.05%+0.2%FS		≤0.05%+0.1%FS		≤0.05%+0.05%FS
	回读分辨率	1mV		10mV		
	回读精度	≤0.05%+0.2%FS		≤0.05%+0.1%FS		≤0.05%+0.05%FS
	负载调节率	≤0.05%+20mV	≤0.1%+20mV	≤0.1%+30mV		
	电源调节率	≤0.05%+20mV	≤0.1%+20mV	≤0.1%+30mV		
	纹波	≤50mVrms	≤60mVrms	≤100mVrms	≤150mVrms	≤300mVrms
电流	设定分辨率	10mA	1mA			
	设定精度	≤0.1%+0.05%FS		≤0.1%+0.1%FS	≤0.1%+0.2%FS	≤0.05%+0.5%FS
	回读分辨率	10mA	1mA			
	回读精度	≤0.1%+0.05%FS		≤0.1%+0.1%FS	≤0.1%+0.2%FS	≤0.1%+0.5%FS
	负载调节率	≤0.1%+30mA	≤0.1%+20mA	≤0.1%+30mA		
	电源调节率	≤0.1%+30mA	≤0.1%+20mA	≤0.1%+30mA		
	纹波	≤60mArms		≤100mArms	≤150mArms	≤300mArms
工作条件		温度: 0°C~40°C, 湿度: 20%RH~80%RH				
存储条件		温度: -10°C~55°C, 湿度: 10%RH~90%RH				
散热方式		风冷				
电源		220V±10%, 50Hz/60Hz				
尺寸 (长×宽×高)		215x405.5x88mm				
重量		7.5kg				