

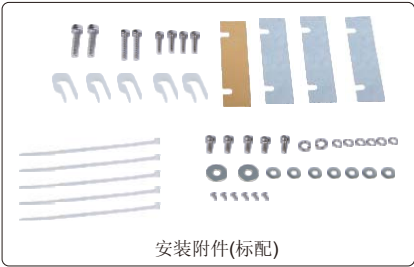



光栅尺(RS422信号)

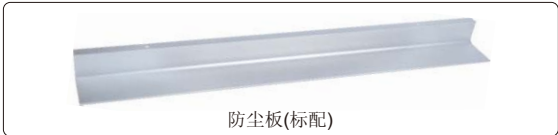

ISL-B5-450A

- 符合光栅线位移传感器国家机械行业标准
- 连接数显箱或PLC使用

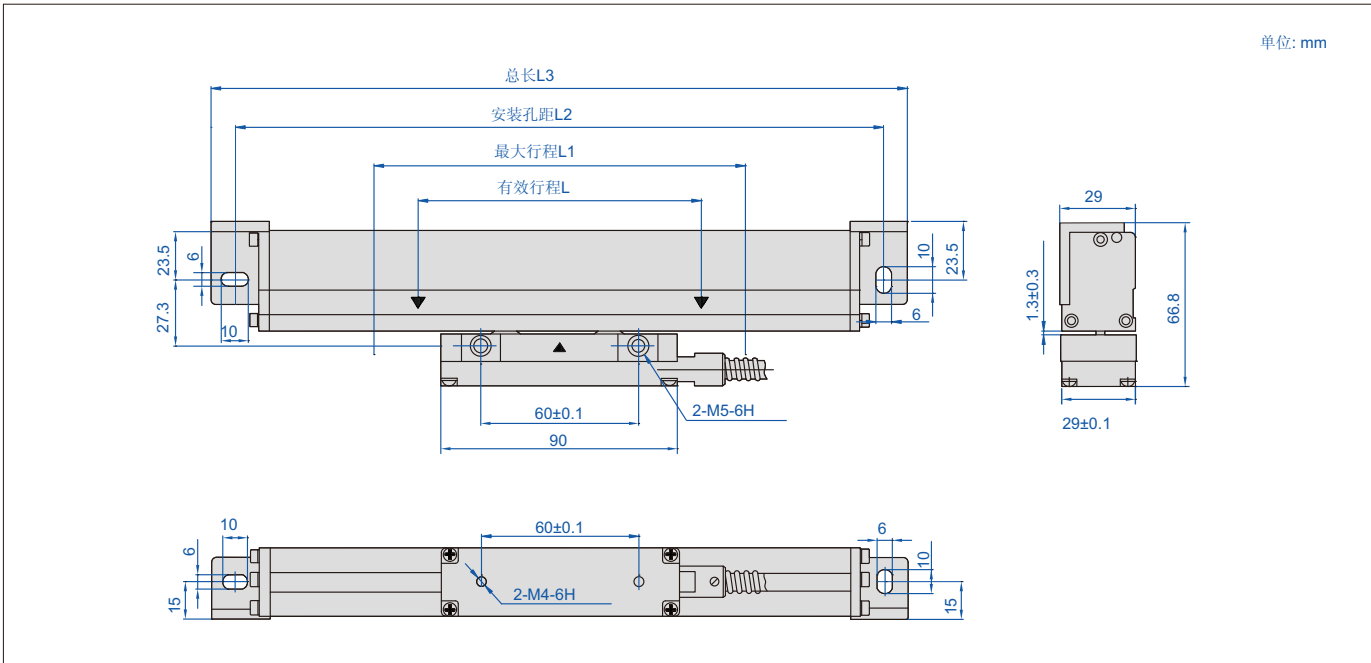

有效行程(L)	型号	
	ISL-B1系列	ISL-B5系列
50mm	ISL-B1-50A	ISL-B5-50A
100mm	ISL-B1-100A	ISL-B5-100A
150mm	ISL-B1-150A	ISL-B5-150A
200mm	ISL-B1-200A	ISL-B5-200A
250mm	ISL-B1-250A	ISL-B5-250A
300mm	ISL-B1-300A	ISL-B5-300A
350mm	ISL-B1-350A	ISL-B5-350A
400mm	ISL-B1-400A	ISL-B5-400A
450mm	ISL-B1-450A	ISL-B5-450A
500mm	ISL-B1-500A	ISL-B5-500A
550mm	ISL-B1-550A	ISL-B5-550A
600mm	ISL-B1-600A	ISL-B5-600A
650mm	ISL-B1-650A	ISL-B5-650A
700mm	ISL-B1-700A	ISL-B5-700A
750mm	ISL-B1-750A	ISL-B5-750A
800mm	ISL-B1-800A	ISL-B5-800A
850mm	ISL-B1-850A	ISL-B5-850A
900mm	ISL-B1-900A	ISL-B5-900A
950mm	ISL-B1-950A	ISL-B5-950A
1000mm	ISL-B1-1000A	ISL-B5-1000A

有效行程(L)	型号	
	ISL-B1系列	ISL-B5系列
1100mm	ISL-B1-1100A	ISL-B5-1100A
1200mm	ISL-B1-1200A	ISL-B5-1200A
1300mm	ISL-B1-1300A	ISL-B5-1300A
1400mm	ISL-B1-1400A	ISL-B5-1400A
1500mm	ISL-B1-1500A	ISL-B5-1500A
1600mm	ISL-B1-1600A	ISL-B5-1600A
1700mm	ISL-B1-1700A	ISL-B5-1700A
1800mm	ISL-B1-1800A	ISL-B5-1800A
1900mm	ISL-B1-1900A	ISL-B5-1900A
2000mm	ISL-B1-2000A	ISL-B5-2000A
2100mm	ISL-B1-2100A	ISL-B5-2100A
2200mm	ISL-B1-2200A	ISL-B5-2200A
2300mm	ISL-B1-2300A	ISL-B5-2300A
2400mm	ISL-B1-2400A	ISL-B5-2400A
2500mm	ISL-B1-2500A	ISL-B5-2500A
2600mm	ISL-B1-2600A	ISL-B5-2600A
2700mm	ISL-B1-2700A	ISL-B5-2700A
2800mm	ISL-B1-2800A	ISL-B5-2800A
2900mm	ISL-B1-2900A	ISL-B5-2900A
3000mm	ISL-B1-3000A	ISL-B5-3000A

技术参数

型号	ISL-B1系列	ISL-B5系列
最大行程L1(mm)	L+30(L≤900), L+50(L>900)	L+30(L≤900), L+50(L>900)
安装孔距L2(mm)	L+136(L≤900), L+156(L>900)	L+136(L≤900), L+156(L>900)
总长L3(mm)	L+154(L≤900), L+174(L>900)	L+154(L≤900), L+174(L>900)
分辨率	1μm	5μm
尺身厚度	29mm	
最大测量速度	60m/min	
栅距	20μm	
原点间距	50mm	
精度	±(5+5L/1000)μm, L是测量长度(单位: mm)	
线缆长度	3.5m(L: 50-950mm), 5m(L: 1000-1900mm), 10m(L: 2000-3000mm)	
输出信号	RS422	
接头类型	9针	
工作电压	5±0.25V	

标准配置

主尺(带线缆)	1个
L形支撑板	1个
防尘板	1个
加固铝条	1个(仅限量程1500mm以上的光栅尺)
安装附件	1包