

螺纹定位规

可定制规格或精度等级




4662-12R



4662-3



应用

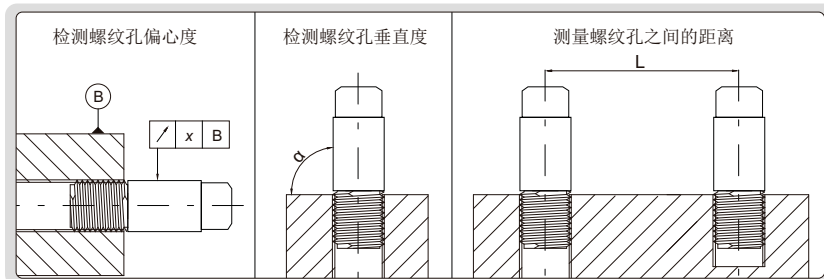

■ 硬度: 60+3HRC

公制螺纹

型号	螺纹规格
4662-3	M3×0.5-6H
4662-4	M4×0.7-6H
4662-5	M5×0.8-6H
4662-6	M6×1-6H
4662-8	M8×1.25-6H
4662-8P	M8×1-6H
4662-10	M10×1.5-6H
4662-10P	M10×1-6H
4662-12	M12×1.75-6H
4662-12P	M12×1-6H
4662-12R	M12×1.5-6H
4662-14	M14×2-6H
4662-14P	M14×1-6H
4662-14R	M14×1.5-6H
4662-16	M16×2-6H
4662-16P	M16×1-6H
4662-16R	M16×1.5-6H
4662-20	M20×2.5-6H
4662-20P	M20×1-6H
4662-20R	M20×1.5-6H

美标统一螺纹

型号	螺纹规格
4665-61	No. 6-32UNC
4665-62	No. 6-40UNF
4665-81	No. 8-32UNC
4665-82	No. 8-36UNF
4665-101	No. 10-24UNC
4665-102	No. 10-32UNF
4665-121	No. 12-24UNC
4665-122	No. 12-28UNF
4665-123	No. 12-32UNEF
4665-1B1	1/4-20UNC
4665-1B2	1/4-28UNF
4665-1B3	1/4-32UNEF
4665-3C1	3/8-16UNC
4665-3C2	3/8-24UNF
4665-3C3	3/8-32UNEF
4665-1A1	1/2-13UNC
4665-1A2	1/2-20UNF
4665-1A3	1/2-28UNEF
4665-3B1	3/4-16UNC
4665-3B3	3/4-20UNEF