

定制塞规

可定制其它等级, 如H8, H9, G7
可定制直径, 如19.003mm
可以定制长度, 如200mm

- 符合JJG光滑极限量规国家计量检定规程
- 包含通规和止规
- 硬度HRC60±2
- 塞规手柄直径小于两端的测头, 用于测量深孔


H7

型号	规格(mm)	L(mm)	L1(mm)	L2(mm)	Ød(mm)
4225-3C	3	110	20	20	2
4225-4C	4	110	20	20	3
4225-5C	5	110	20	20	3
4225-6C	6	110	20	20	5
4225-7C	7	110	20	20	5
4225-8C	8	110	20	20	5
4225-9C	9	110	20	20	5
4225-10C	10	120	20	20	8
4225-11C	11	120	20	20	8
4225-12C	12	120	20	20	8
4225-13C	13	120	20	20	8
4225-14C	14	120	20	20	8
4225-15C	15	120	20	20	8
4225-16C	16	140	25	25	10
4225-17C	17	140	25	25	10
4225-18C	18	140	25	25	10
4225-19C	19	140	25	25	10
4225-20C	20	140	25	25	10

细长把手极限塞规



4225-16

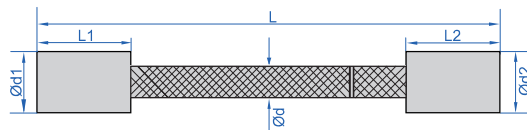

H7尺寸公差 (mm)

直径(mm)	Ød1 通规尺寸公差(mm)	Ød2 止规尺寸公差(mm)
≤3	+0.0010/+0.0022	+0.0088/+0.010
>3, ≤6	+0.0013/+0.0027	+0.0106/+0.012
>6, ≤10	+0.0015/+0.0033	+0.0132/+0.015
>10, ≤18	+0.0018/+0.0038	+0.0160/+0.018
>18, ≤30	+0.0018/+0.0038	+0.0160/+0.018