

万能比较测量仪



- 符合企业标准
- 用于测量外径、内径、中心距等
- 测头活动范围: 10mm, 测头有效量程: $\pm 2\text{mm}$
- 可选附件: 量块附件(6881系列), 块规夹子(6886系列), 长度设定仪(ISQ系列)




型号	外径测量范围**	内径测量范围**	精度	重复性*
2927-M200	0-200mm/0-8"	30-250mm/1.2"-10"	$\pm 5\mu\text{m}$	$2\mu\text{m}$

*对零后, 在零位 $\pm 2\text{mm}$ 范围内精度可达 $\pm 5\mu\text{m}$
 **安装不同测头使用时, 内/外径测量范围会随之变化

延长杆(选配)

型号	长度(L)	材质
2927-A200	200mm	钢
2927-A500	500mm	钢



数显千分表(选配)



分辨率: 0.001mm/0.00005"

型号	测量范围
2103-10F	12.7mm/0.5"






支架(选配, 成对提供)

型号
2927-H




盘形测头(选配, 成对提供)




型号
2927-S101


圆锥形测头(选配, 成对提供)

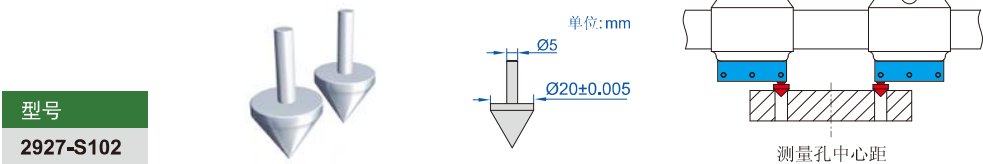


肩形测头(选配, 成对提供)

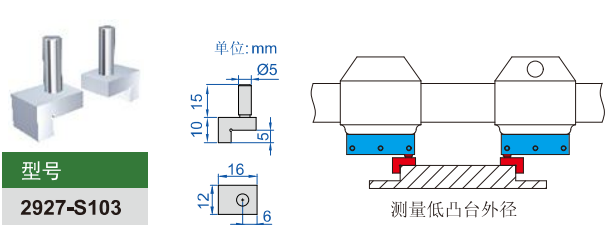


圆肩形测头(选配, 成对提供)

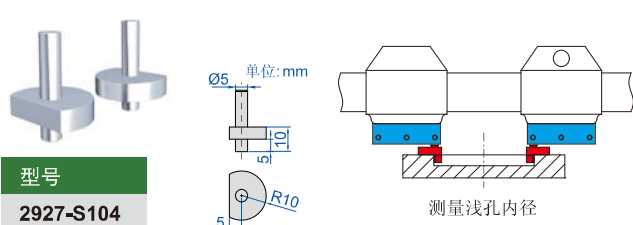

量爪(选配, 成对提供)

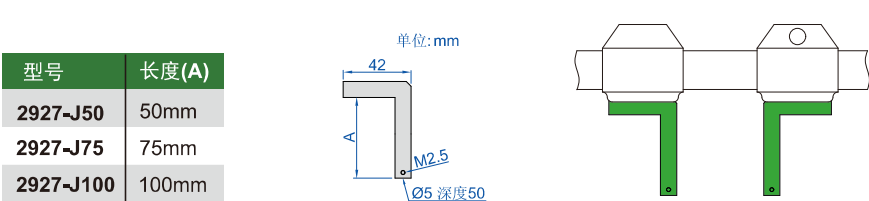



深度限位块(选配, 成对提供)

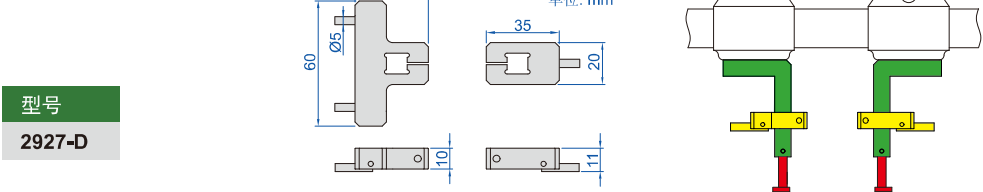


球面测头
(选配, 单个供应)





平面测头
(选配, 单个供应)





V形放置座(选配, 成对提供)

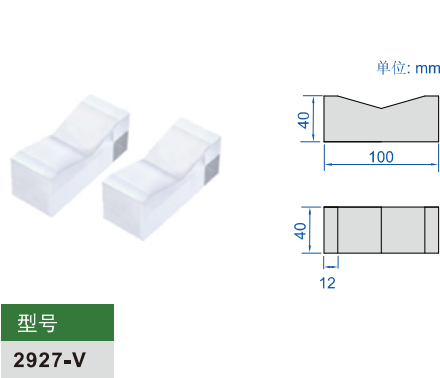


量表测头(选配, 单个供应)
6282系列

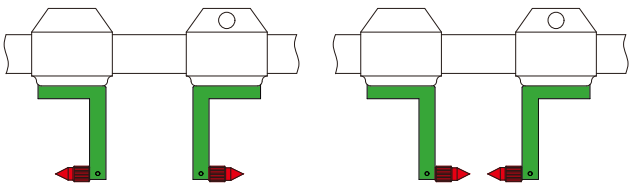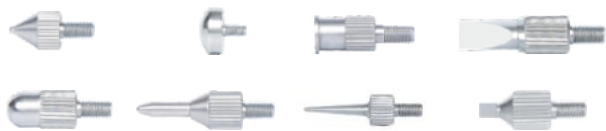

多功能测头(选配, 成对提供)
7392系列

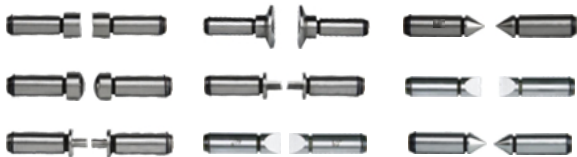



测头座
(选配, 成对提供)
型号
2927-T101

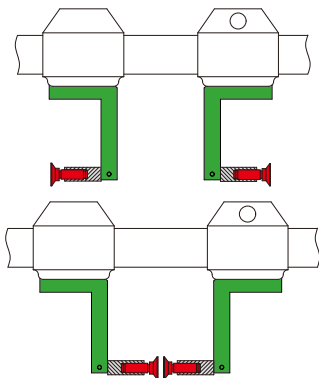

配合多功能测头, 测头可旋转

* 需选购测头座**2927-T101**


球测头(选配, 成对提供)
7391系列

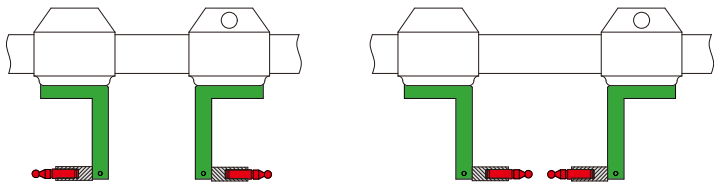

配合球测头, 测头可旋转

* 需选购测头座**2927-T101**


外螺纹测头(选配, 成对提供)
7381系列



配合外螺纹测头, 测头可旋转

* 需选购测头座**2927-T101**

内螺纹测头(选配, 成对提供)
7321系列



配合内螺纹测头, 测头可旋转

* 需选购测头座**2927-T101**